


振動減衰の技

TiNベアリングの威力

NEW

MDSK6 シリーズ追加
MDSK13

アジャストねじ(G No.)仕様にも対応出来ます。別途ご相談下さい。

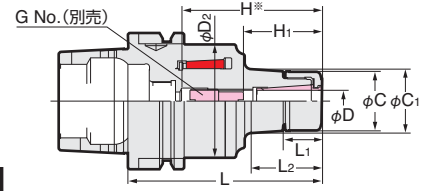

H* : MAX. 刃物シャンク挿入長

PAT.

MDSK

テーパ	Code No.	D	L	L ₁	L ₂	C	C ₁	C ₂	H*	H ₁	G No. (別売)	重量 (kg)	適用コレット	
HSK 50A	HSK 50A-MDSK 6- 70	3.0~6.0	70	16.2	18.2	19.5	19.5	41.6	48	48	-	0.7	SK 6 A	
	- 90		90		38.2		21.9		68	21~35	SKG- 8	1.0		
	-MDSK10- 70	3.0~10.0	70	18.2	19.2	27.5	27.5		46	46	-	0.7	SK10 A	
	- 90		90		38.2		30.3		66	31~45	SKG-12S	1.0		
	-MDSK13- 90	3.0~13.0	90	22.0	40.0	33.0	35.6		66	66	-	1.1	SK13 A	
-MDSK16-115	3.0~16.0	115	23.0	24.0	40.0	40.0	54.0	91	45~70	SKG-18S	1.4	SK16 A		
HSK 63A	HSK 63A-MDSK 6- 75	3.0~6.0	75	16.2	18.0	19.5	19.5	52.4	50	21~28	SKG- 8	1.0	SK 6 A	
	- 90		90		33.0		21.9		65	21~35		1.1		
	-105		105		48.0		24.0		80			1.4		
	-120		120		63.0		26.1		95			1.6		
	-MDSK10- 75	3.0~10.0	75	18.2	19.0	27.5	27.5		49	49	-	1.1	SK10 A	
	- 90		90		33.0		29.6		64	31~40	SKG-12S	1.4		
	-105		105		48.0		31.7		79	31~50	1.6			
	-120		120		63.0		33.8		94	30~50	SKG-12L	1.8		
	-135	135	79.0	36.0	109	2.1								
	-MDSK13- 80	3.0~13.0	80	22.0	24.0	33.0	33.0		54	54	-	1.2	SK13 A	
	- 90		90		33.0		34.6		64	64	1.5			
	-105		105		48.0		36.7		79	31~54	SKG-15	1.7		
	-120		120		63.0		38.8		94		1.9			
	-135	135	78.0	40.9	110	2.2								
	-MDSK16- 80	3.0~16.0	80	23.0	24.0	40.0	40.0		54	54	-	1.3	SK16 A	
	- 90		90		34.2		41.6		64	64	1.5			
	-105		105		49.3		43.7		79	45~60	SKG-18S	1.7		
	-120		120		64.3		45.8		85		1.9			
-135	135	79.0	47.9	105	SKG-18L	2.2								
-MDSK20- 90	4.0~20.0	90	25.2	40.9	48.0	51.2	64	64	-	1.9	SK20 A			
-105		105		54.3		51.1	79	79	2.1					
-120		120		70.0		50.6	94	47~70	SKG-22	2.4				
-135		135		85.8		51.2	105		2.5					
HSK 100A	HSK100A-MDSK 6-110	3.0~6.0	110	16.2	33.0	19.5	21.9	54.0	80	21~35	SKG- 8	3.9	SK 6 A	
	-125		125		48.0		24.0		95			4.0		
	-140		140		63.0		26.1		110			4.1		
	-165		165		88.0		29.6		135			4.5		
	-MDSK10-110	3.0~10.0	110	18.2	33.0	27.5	29.8		80	30~50	SKG-12L	4.0	SK10 A	
	-125		125		48.0		31.7		95			4.1		
	-140		140		63.0		33.8		110			4.2		
	-165		165		89.0		37.4		135			4.6		
	-MDSK13-110	3.0~13.0	110	22.0	33.0	33.0	34.6		75	31~52	SKG-15	4.3	SK13 A	
	-125		125		48.0		36.7		90			4.4		
	-140		140		63.0		38.8		105			4.5		
	-165		165		88.0		42.3		130			5.0		
	-MDSK16-125	3.0~16.0	125	23.0	51.0	40.0	44.0		87	45~65	SKG-18S	4.6	SK16 A	
	-140		140		66.0		46.1		104			45~70		4.8
	-165		165		91.0		49.6		129					SKG-18L
	-MDSK20-140	4.0~20.0	140	25.2	42.0	48.0	51.4		104	47~70	SKG-22	4.9	SK20 A	
	-165		165		67.0		54.9		129			47~80		5.5
	-MDSK25-140	8.0~25.4	140	27.0	43.0	55.0	57.3		104	55~75	SKG-28	4.9	SK25 A	
-165	165		69.0		60.9		129	55~85	5.6					

★エンドミルには、必ず SK Aタイプコレットをご使用ください。SK Aタイプコレットは付属していません。別途ご注文下さい。☎P.205

★GHハンドルは付属していません。別途ご注文下さい。☎P.30

コードNo.は、MDSK6型:GH6, MDSK10型:GH10, MDSK13型:GH12, MDSK16型:GH16, MDSK20型:GH20, MDSK25型:GH25

★高速回転用は、コードNo.の末尾に“P”を付加して下さい。例) HSK63A-MDSK10-75P

★アジャストねじ仕様にも対応しています。別途ご相談下さい。

